Crommelin®

AquaBlock waterproof

Waterproof Primer & Undercoat
Kitchen · Bathroom · Laundry

Surface Waterproofing
Waterproofs surfaces to eliminate damage caused by wet & humid conditions. Not suitable for use prior to tiling.



Prevents Mould
Active fungicide to prevent mould and mildew growth.

Stain Coverage
Maximum stain coverage for a professional top coat finish.

Damp Protection
Locks out moisture, preventing cracking & peeling of top coats.

Surface Binding
Binds and primes surfaces prior to painting to ensure excellent paint adhesion. Not suitable for White Set Plaster.

Available at BUNNINGS warehouse
bunnings.com.au

Still not sure? 7 day helpline 1800 655 711.

Turn over for application guide.

Crommelin®

AquaBlock waterproof

Waterproof Primer & Undercoat

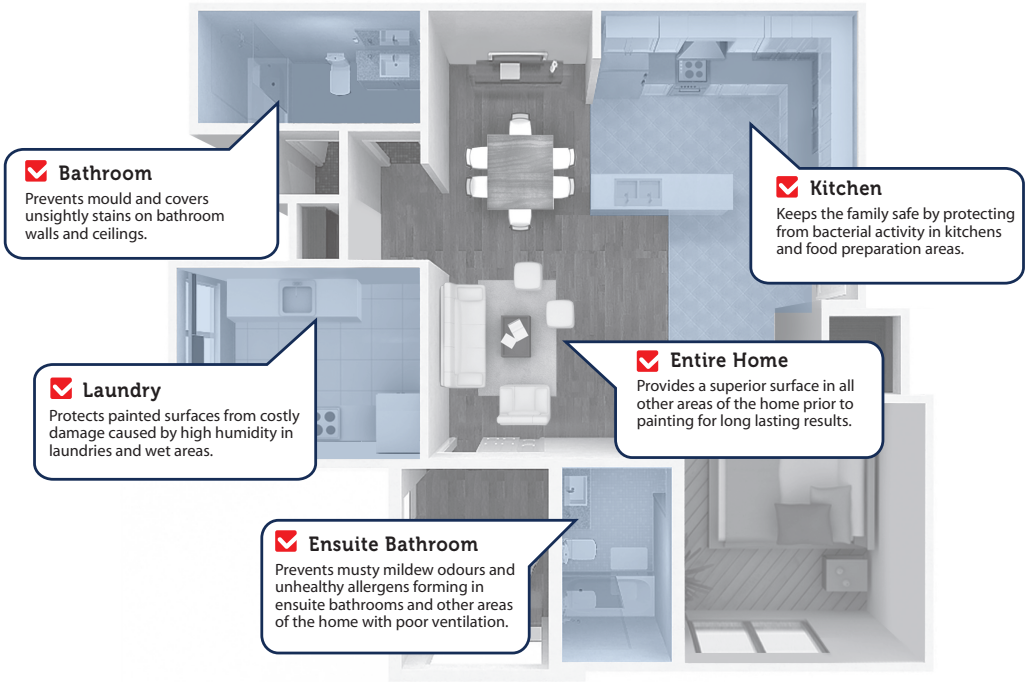

Bathroom
Prevents mould and covers unsightly stains on bathroom walls and ceilings.

Kitchen
Keeps the family safe by protecting from bacterial activity in kitchens and food preparation areas.

Laundry
Protects painted surfaces from costly damage caused by high humidity in laundries and wet areas.

Entire Home
Provides a superior surface in all other areas of the home prior to painting for long lasting results.

Ensuite Bathroom
Prevents musty mildew odours and unhealthy allergens forming in ensuite bathrooms and other areas of the home with poor ventilation.

Suitable Substrates

- Plaster and plasterboard.
- Fibre cement sheet.
- Brick work.
- Render and hard wall plaster.
- Timber.
- Steel.
- **Not suitable for White Set Plaster.**

Surface Preparation

- All surfaces should be thoroughly clean, dust and contaminant free.
- Any loose, friable or water damaged surfaces should be removed and repaired.
- To achieve maximum adhesion and performance all surfaces must be dry prior to application.
- Due to the wide variety of surfaces a test patch should be applied prior to full application.

Application Process

- AquaBlock is best applied with a good quality medium nap roller or brush.
- Apply AquaBlock following specified coverage rates leaving a smooth and consistent finish.
- If applying to very dusty plaster, prime with Crommelin Slate Sealer.
- If using as a stain blocker, allow 24 hours between coats.

Coverage

- 12-14m^2/L per coat.
- Apply 2 coats for good waterproofing and stain repellence.
- 1 - 2 hours before application of second coat.
- 2-4 hours before water based top coats are applied.

Recoat/ Cure Time (at 25°c)

- AquaBlock Waterproof is suitable for coating with all good quality water based acrylic paints and finishes.
- To ensure complete suitability of top coat a trial patch is recommended.
- Allow 7 days for full waterproofing performance.

Crommelin®
Waterproofing & Sealing

Still not sure? 7 day helpline 1800 655 711.

9 318513 124900 >